



STANFORD
LIGHTING

LUMINARIAS LED
CATALOGO 2020

Nuestros productos están fabricados bajo los más estrictos estándares de calidad, seguridad y fiabilidad, utilizando los mejores insumos que garantizan su durabilidad ante las más extremas condiciones, cumpliendo con todas las normas requeridas por el Mercado para satisfacer las necesidades exigidas.



INDICE



Ampolletas LED

01-11



Tubos y Cintas LED

12-14



Paneles LED

15-20



Luminarias Lineales
LED y Estancos

21-25



Proyectores LED

26-28



Focos Rieles y
Downlight

29-43



Campanas industriales

44



Faroles y Tortugas

45-51



Lamparas y Señaléticas de
Emergencia

52-57



Aplicques solares

58-63



Proyectores solares

64



Alumbrado Publico Solar

65



Alumbrado Publico

66-67





LED CUP BULB GU-10

CHARACTERISTIC DESCRIPTION

- LED PAR 16 reflector, the technology and design provide uniform light distribution.
- Low consumption, it can save 80% energy compared with halogen light.
- Up to 25000 hours.
- SMD LED chip technology.
- No mercury or toxic substances.
- Distribution type: direct symmetry.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
GU10-6CL	6W	AC175-250	450	>50%	75	3000K	80	38°	25000
GU10-6FR	6W	AC175-250	480	>50%	80	6500K	80	38°	25000

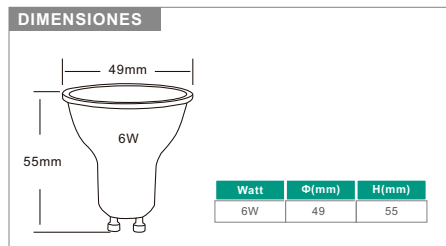



LED CUP BULB GU-10

CHARACTERISTIC DESCRIPTION

- LED PAR 16 reflector, the technology and design provide uniform light distribution.
- Low consumption, it can save 80% energy compared with halogen light.
- Up to 25000 hours.
- SMD LED chip technology.
- No mercury or toxic substances.
- Distribution type: direct symmetry.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
YDL-GU10-XIII	6W	AC175-250	450	>50	75	3000K	80	120°	25000
YDL-GU10-XIII	6W	AC175-250	480	>50	80	6500K	80	120°	25000
YDL-GU10-XIII	6W	AC170-265	470	>85	75	3000K	80	120°	30000

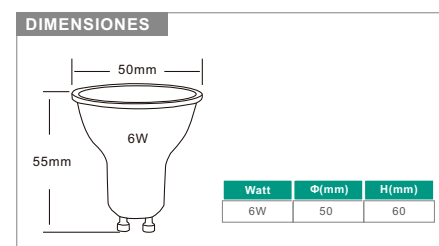





CLASSICAL LED BULB A60/A65

CHARACTERISTIC DESCRIPTION

- LED bulb is mainly used for home lighting, and the main source of indoor lighting.
- Low consumption, it can save 90% energy compared with incandescent bulbs.
- Up to 30000 hours.
- SMD LED chip technology.
- No mercury or toxic substances.
- Distribution type: direct symmetry.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
LD-A6005C	5W	AC220-240	450	>83	90	2800K	80	160°	30000
LD-A6005F	5W	AC220-240	480	>83	90	6500K	80	160°	30000
LD-A6007C	7W	AC220-240	600	>83	75	2800K	80	160°	30000
LD-A6007F	7W	AC220-240	600	>83	75	6500K	80	160°	30000
LD-A6009C	9W	AC220-240	800	>83	90	2800K	80	160°	30000
LD-A6009F	9W	AC220-240	800	>83	90	6500K	80	160°	30000
LD-A6011C	11W	AC220-240	1000	>83	90	2800K	80	160°	30000
LD-A6011F	11W	AC220-240	1000	>83	90	6500K	80	160°	30000
LD-A6015C	15W	AC220-240	1100	>83	75	2800K	80	160°	30000
LD-A6015F	15W	AC220-240	1100	>83	75	6500K	80	160°	30000

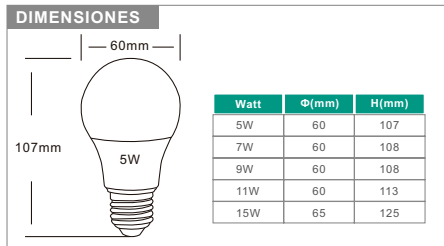



CLASSICAL LED BULB A60/A65

CHARACTERISTIC DESCRIPTION

- LED bulb is mainly used for home lighting, and the main source of indoor lighting.
- Low consumption, it can save 90% energy compared with incandescent bulbs.
- Up to 30000 hours.
- SMD LED chip technology.
- No mercury or toxic substances.
- Distribution type: direct symmetry.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
C37-6CL(E27)	6W	AC175-250	450	>50	75	3000K	80	160°	25000
C37-6FR(E27)	6W	AC175-250	470	>50	80	6500K	80	160°	25000
C37-6CL(E14)	6W	AC175-250	450	>50	75	3000K	80	160°	25000

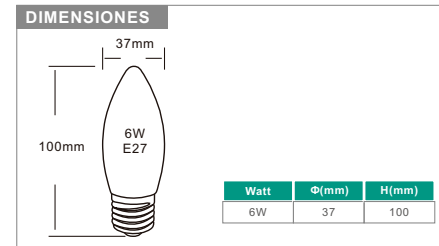





MINI BALL LED BULB G45

CHARACTERISTIC DESCRIPTION

- LED Mini bulb is mainly used for home lighting, and the main source of indoor lighting.
- Save 90% energy compared with incandescent bulbs.
- Up to 25000 hours.
- SMD LED chip technology.
- No mercury or toxic substances.
- Distribution type: direct symmetry.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
G45-6CL(E27)	6W	AC175-250	440	>50	73	3000K	80	160°	25000
G45-6CL(E14)	6W	AC175-250	440	>50	73	3000K	80	160°	25000

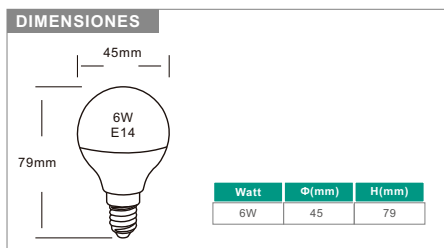



LED REFLECT BULB R63

CHARACTERISTIC DESCRIPTION

- LED Reflect bulb is mainly used for home lighting, and the main source of indoor lighting.
- Save 90% energy compared with incandescent bulbs.
- Up to 25000 hours.
- SMD LED chip technology.
- No mercury or toxic substances.
- Distribution type: direct symmetry.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
R63-9CL	9W	AC175-250	690	>50	75	3000K	70	120°	25000
R63-9FR	9W	AC175-250	720	>50	80	6500K	70	120°	25000

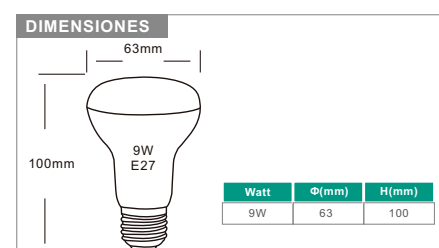



HIGH POWER LED BULB T SHAPE

CLASSICAL FILAMENT LED BULB FA60

CHARACTERISTIC DESCRIPTION

- High power and high flow LED, the design provides uniform light distribution.
- Low consumption, it can save 80% energy compared with incandescent bulbs and similar lumen bulbs.
- Solid design.
- SMD LED chip technology.
- No mercury or toxic substances.
- Distribution type: direct symmetry







CHARACTERISTIC DESCRIPTION


- LED decorative lights, elegant appearance for home and commercial lighting.
- Classical design
- Made of glass
- Filamentous technology
- Distribution type: Asymmetric direct



MODEL	POWER	BASE	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)		(V)	(lm)		(lm/W)	(K)			(h)
T20	20W	E27	AC175-250	1800	>70	90	6500K	70	270°	30000
T30	30W	E27	AC175-250	2700	>70	90	6500K	70	270°	30000
T40	40W	E27	AC175-250	3600	>70	90	6500K	70	270°	30000
T50	50W	E27	AC175-250	4500	>70	90	6500K	70	270°	30000
T65	65W	E27	AC175-250	4800	>70	90	6500K	70	270°	30000
T80	80W	E40	AC175-250	7200	>70	90	6500K	70	270°	30000
T100	100W	E40	AC175-250	9000	>70	90	6500K	70	270°	30000
T150	150W	E40	AC175-250	13500	>70	90	6500K	70	270°	30000

MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
FA60-6W	6W	AC175-250	600	>50	100	2700K	80	280°	15000
FA60-8W	8W	AC175-250	800	>50	100	2700K	80	280°	15000

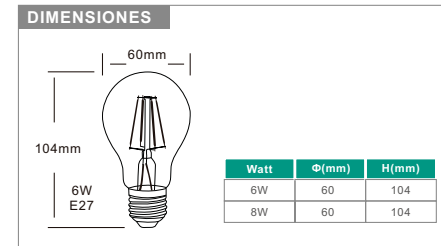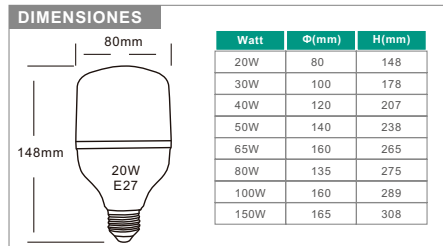

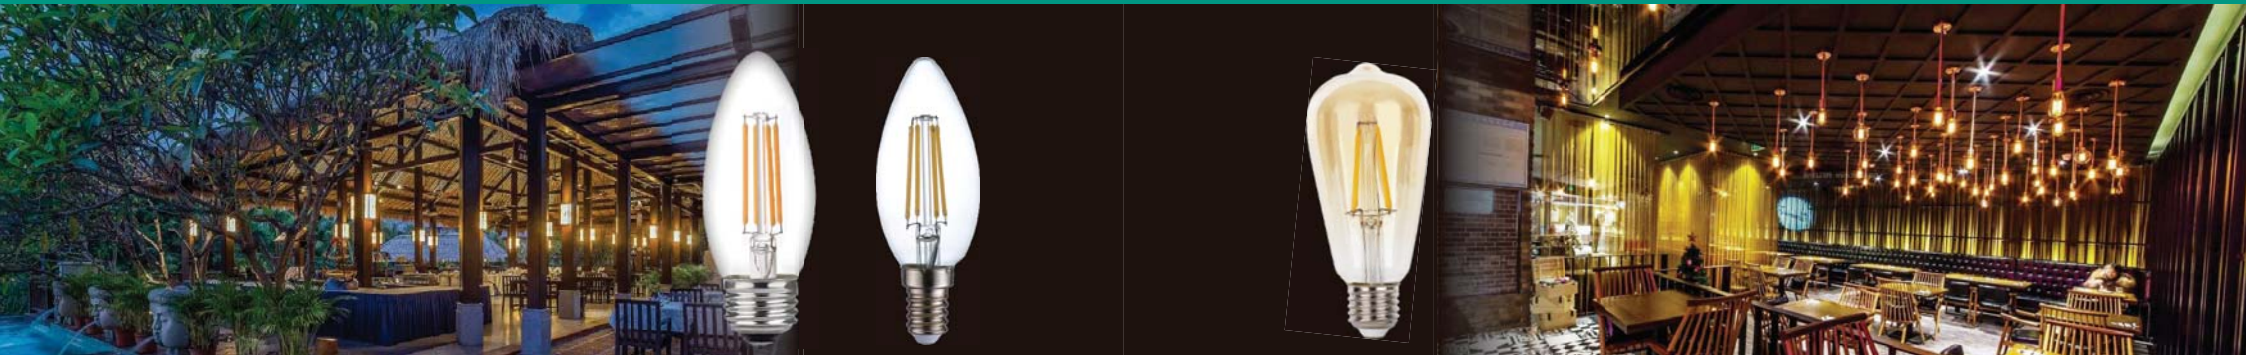

FILAMENT LED BULBLED CANDLE BULB FC37

CLASSICAL FILAMENT LED BULB ST64

CHARACTERISTIC DESCRIPTION

- LED decorative lights, elegant appearance for home and commercial lighting.
- Classical design
- Made of glass
- Filamentous technology
- Distribution type: Asymmetric direct







CHARACTERISTIC DESCRIPTION

- LED decorative lights, elegant appearance for home and commercial lighting.
- Classical design
- Made of glass
- Filamentous technology
- Distribution type: Asymmetric direct .



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
FC37-4(E27)	4W	AC175-250	400	>50	105	2700K	80	280°	15000
FC37-4(E14)	4W	AC175-250	400	>50	105	2700K	80	280°	15000

MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
ST64-6W	6W	AC175-250	600	>50	100	2500K	80	280°	15000

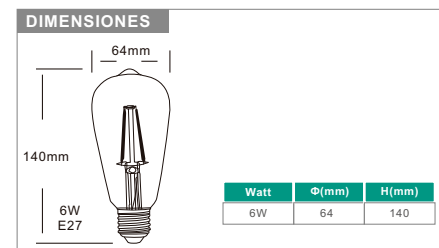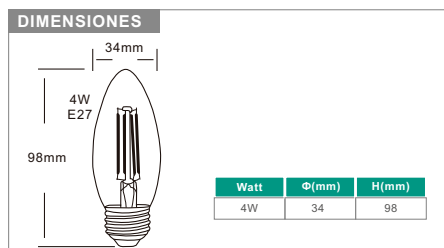





CLASSICAL FILAMENT LED BULB G95

CHARACTERISTIC DESCRIPTION

- LED decorative lights, elegant appearance for home and commercial lighting.
- Made of glass
- Filamentous technology
- Distribution type: Asymmetric direct



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
FG-6W	6W	AC175-250	600	>50	100	2500K	80	280°	15000

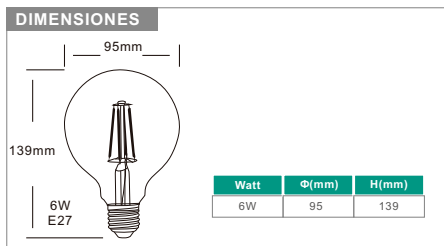



LED TUBE T8 GLASS

CHARACTERISTIC DESCRIPTION

- LED T8 Glass Tube, with efficiency up to 89 lm / W, energy saving up to 60%; and with easy installation, low maintenance costs and no mercury.
- Traditional tube design
- LED SMD chip technology and integrated driver tube.
- Distribution type: Direct Asymmetric



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
HL-15031	9W	AC175-250	800	>93	88	6500K	80	270°	25000
HL-15031	18W	AC175-250	1440	>93	88	6500K	80	270°	25000
HL-15031	9W	AC175-250	800	>93	88	4000K	80	270°	25000
HL-15031	18W	AC175-250	1440	>93	88	4000K	80	270°	25000
HL-15031	9W	AC175-250	800	>93	88	3000K	80	270°	25000
HL-15031	18W	AC175-250	1440	>93	88	3000K	80	270°	25000


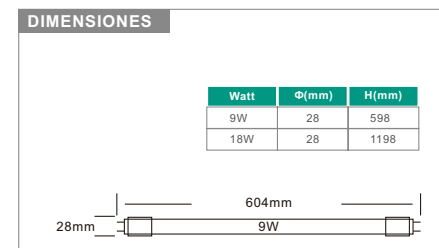




COLORFUL LED TUBE



MODEL	POWER	VOLTAGE	COLOR	POWER FACTOR	LED TYPE	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)						(h)
HL-18RD	18W	AC165-265	ROJO	>93	SMD2835	80	270°	25000
HL-18YL	18W	AC165-265	AMARILLO	>93	SMD2835	80	270°	25000
HL-18BL	18W	AC165-265	AZUL	>93	SMD2835	80	270°	25000
HL-18GR	18W	AC165-265	VERDE	>93	SMD2835	80	270°	25000
HL-18UV	18W	AC165-265	ULTRAVIOLETA	>93	SMD2835	80	270°	25000

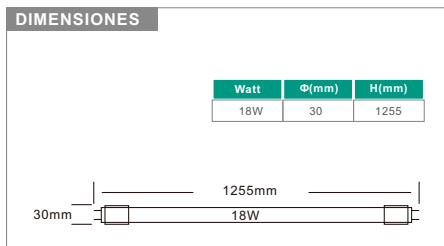



LED TAPE

CHARACTERISTIC DESCRIPTION

- Led tape is widely used in windows, kitchens, bars and entertainment places.
- Five meter led tape.
- Different colors available.
- Silicon coating.
- You can cut along the broken line.
- Up to 30000 hours.
- 5050 LED chip The entire length of the tape is uniform light.



MODEL	LED TYPE	LENGTH	LUMEN	POWER	INGRESS PROTECTION	CCT	VOLTAGE	BEAM ANGLE	SHEAR MINUTE
		(M)	(LM/M)	(W/M)		(K)			(MM)
OS-5050-12V-01	5050SMD	5	540	6	IP65	3000K	AC100-240	120°	100
OS-5050-12V-02	5050SMD	5	540	6	IP65	4000K	AC100-240	120°	100
OS-5050-12V-03	5050SMD	5	540	6	IP65	6500K	AC100-240	120°	100

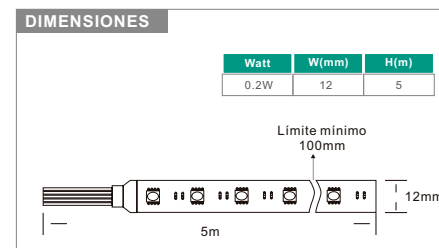





LED ROUND PANEL LIGHT--CONCEALED INSTALLATION

CHARACTERISTIC DESCRIPTION

- High lumen and efficiency with low energy consumption.
- Advanced LED SMD system.
- Electronic driver included.
- Aluminum alloy frame with high dispersion capacity.
- Diffuser: Transparent white color.
- Distribution type: direct symmetry
- Installation type: Embed/concealed



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
QS-106W	6W	AC175-265	360	>93	60	3000K	80	120°	30000
QS-106W	6W	AC175-265	360	>93	60	6500K	80	120°	30000
QS-106W	6W	AC175-265	360	>93	60	4000K	80	120°	30000
QS-112W	12W	AC175-265	840	>93	70	3000K	80	120°	30000
QS-112W	12W	AC175-265	840	>93	70	6500K	80	120°	30000
QS-112W	12W	AC175-265	840	>93	70	4000K	80	120°	30000
QS-118W	18W	AC175-265	1440	>93	80	3000K	80	120°	30000
QS-118W	18W	AC175-265	1440	>93	80	6500K	80	120°	30000
QS-118W	18W	AC175-265	1440	>93	80	4000K	80	120°	30000
QS-124W	24W	AC175-265	1920	>93	80	3000K	80	120°	30000
QS-124W	24W	AC175-265	1920	>93	80	6500K	80	120°	30000
QS-124W	24W	AC175-265	1920	>93	80	4000K	80	120°	30000

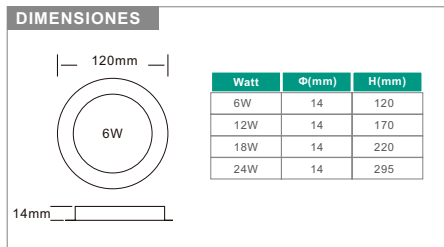



LED ROUND PANEL LIGHT--SURFACE MOUNTED

CHARACTERISTIC DESCRIPTION

- High lumen and efficiency with low energy consumption.
- Advanced LED SMD system.
- Electronic driver included.
- Aluminum alloy frame with high dispersion capacity.
- Diffuser: Transparent white color.
- Distribution type: direct symmetry
- Installation type: surface mounted



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
QS-306W	6W	AC175-265	390	>93	65	3000K	80	120°	30000
QS-306W	6W	AC175-265	390	>93	65	6500K	80	120°	30000
QS-306W	6W	AC175-265	390	>93	65	4000K	80	120°	30000
QS-312W	12W	AC175-265	840	>93	70	3000K	80	120°	30000
QS-312W	12W	AC175-265	840	>93	70	6500K	80	120°	30000
QS-312W	12W	AC175-265	840	>93	70	4000K	80	120°	30000
QS-318W	18W	AC175-265	1440	>93	80	3000K	80	120°	30000
QS-318W	18W	AC175-265	1440	>93	80	6500K	80	120°	30000
QS-318W	18W	AC175-265	1440	>93	80	4000K	80	120°	30000
QS-324W	24W	AC175-265	1920	>93	80	3000K	80	120°	30000
QS-324W	24W	AC175-265	1920	>93	80	6500K	80	120°	30000
QS-324W	24W	AC175-265	1920	>93	80	4000K	80	120°	30000

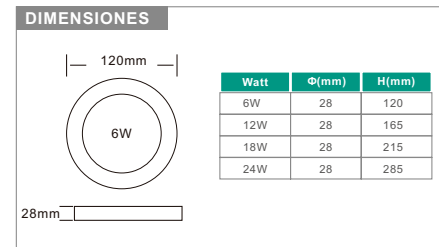





LED PANEL SQUARE LIGHT--CONCEALED INSTALLATION

CHARACTERISTIC DESCRIPTION

- High lumen and efficiency with low energy consumption.
- Advanced LED SMD system.
- Electronic driver included.
- Aluminum alloy frame with high dispersion capacity.
- Diffuser: Transparent white color.
- Distribution type: direct symmetry.
- Installation type: Embed/concealed



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPERATURE	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
QS-212W	12W	AC175-265	840	>93	70	3000K	80	120°	30000
QS-212W	12W	AC175-265	840	>93	70	6500K	80	120°	30000
QS-212W	12W	AC175-265	840	>93	70	4000K	80	120°	30000
QS-218W	18W	AC175-265	1440	>93	80	3000K	80	120°	30000
QS-218W	18W	AC175-265	1440	>93	80	6500K	80	120°	30000
QS-218W	18W	AC175-265	1440	>93	80	4000K	80	120°	30000

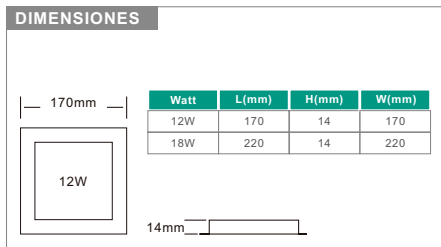



LED PANEL SQUARE LIGHT--SURFACE MOUNTED

CHARACTERISTIC DESCRIPTION

- High lumen and efficiency with low energy consumption.
- Advanced LED SMD system.
- Electronic driver included.
- Aluminum alloy frame with high dispersion capacity.
- Diffuser: Transparent white color.
- Distribution type: direct symmetry.
- Installation type: Embed/concealed



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPERATURE	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
QS-412W	12W	AC175-265	840	>93	70	3000K	80	120°	30000
QS-412W	12W	AC175-265	840	>93	70	6500K	80	120°	30000
QS-412W	12W	AC175-265	840	>93	70	4000K	80	120°	30000
QS-418W	18W	AC175-265	1440	>93	80	3000K	80	120°	30000
QS-418W	18W	AC175-265	1440	>93	80	6500K	80	120°	30000
QS-418W	18W	AC175-265	1440	>93	80	4000K	80	120°	30000
QS-424W	24W	AC175-265	1920	>93	80	3000K	80	120°	30000
QS-424W	24W	AC175-265	1920	>93	80	6500K	80	120°	30000
QS-424W	24W	AC175-265	1920	>93	80	4000K	80	120°	30000

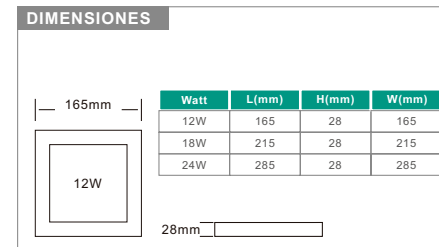



LED PANEL LIGHT-CONCEALED INSTALLATION

LED PANEL LIGHT-SURFACE MOUNTED

CHARACTERISTIC DESCRIPTION

- LED panel has high luminous efficiency and low energy consumption.
- Ultra thin modern design, ideal for office, shop, hospital etc use.
- Advanced LED SMD system.
- Electronic driver included.
- Aluminium frame white+spread PMMA
- Installation type: Embed/Concealed







CHARACTERISTIC DESCRIPTION

- LED panel has high luminous efficiency and low energy consumption.
- Ultra thin modern design, ideal for office, shop, hospital etc use.
- Advanced LED SMD system.
- Electronic driver included.
- Aluminium frame white+spread PMMA.
- Installation type: surface mounted



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPER ATUER	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
HL-60605	48W	AC220-240	3800	>50	80	3000K	80	120°	20000
HL-60605	48W	AC220-240	3800	>50	80	4000K	80	120°	20000
HL-30605	48W	AC220-240	3800	>50	80	6500K	80	120°	20000
HL-60125	72W	AC220-240	5700	>50	80	3000K	80	120°	20000
HL-60125	72W	AC220-240	5700	>50	80	4000K	80	120°	20000
HL-60125	72W	AC220-240	5700	>50	80	6500K	80	120°	20000
HL-30125	48W	AC220-240	3800	>50	80	3000K	80	120°	20000
HL-30125	48W	AC220-240	3800	>50	80	4000K	80	120°	20000
HL-30125	48W	AC220-240	3800	>50	80	6500K	80	120°	20000

MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPER ATUER	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
HL-60600	40W	AC220-240	3600	>50	90	3000K	80	120°	20000
HL-60600	40W	AC220-240	3600	>50	90	4000K	80	120°	20000
HL-60600	40W	AC220-240	3600	>50	90	6500K	80	120°	20000
HL-30123	48W	AC220-240	3800	>50	80	3000K	80	120°	20000
HL-30124	48W	AC220-240	3800	>50	80	4000K	80	120°	20000
HL-30125	48W	AC220-240	3800	>50	80	6500K	80	120°	20000

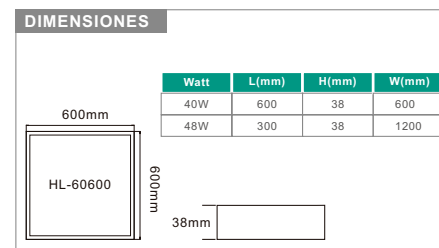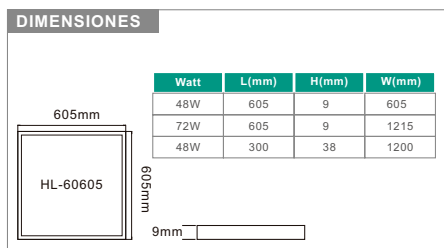





LED TRI-PROOF LIGHT

CHARACTERISTIC DESCRIPTION

- Dust and moisture proof hermetic equipment, ideal for parks, factory, packing etc.
- IP65 Protection Level
- ABS body, PS diffusor
- Including fixed system
- Installation type: Transcend or hanging
- LED Tube Excluded



MODEL	POWER	VOLTAGE	L(mm)xW(mm)xH(mm)
	(W)	(V)	
JLH-218	2x9W	AC220-240	690x104x62
JLH-118	9W	AC220-240	690x70x62
JLH-236	2x18W	AC220-240	1265x104x62
JLH-136	18W	AC220-240	1265x70x62

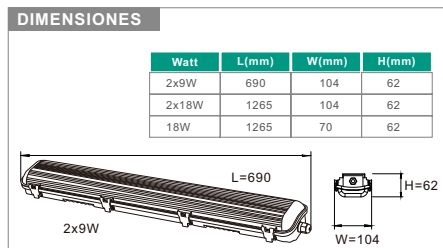



LED TUBE WITH BASE SUPPORT

CHARACTERISTIC DESCRIPTION

- Linear luminescence LED consist of canoe base and LED tube, ideal for house, school,shops etc.
- Ready for installing and use.
- LED tube with high luminous efficiency.
- Canoe base is metal in white color.
- Distribution type: direct symmetry



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPER ATUER	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
HL-901C	9W	AC175-250	800	>93	88	6500K	>70	270°	30000
HL-1801C	18W	AC175-250	1440	>93	88	6500K	>70	270°	30000

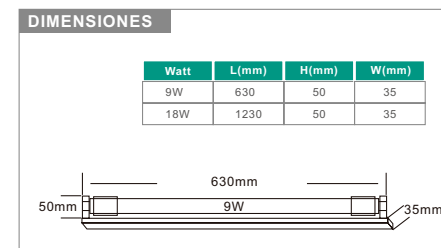





INTEGRATED LED TUBE T5

CHARACTERISTIC DESCRIPTION

- The integrated linear luminescence LED consist of base, LED light source, driver and diffuser.
- Ideal for house, shop,school,office etc.
- Ready for installing and use.
- LED tube with high luminous efficiency.
- Aluminum base with high dispersion ability.
- Diffuser: PC
- With switch on and off.
- Distribution type: direct symmetry
- Installation type:surface mounted



MODEL	POWER	VOLTAGE	L(mm)xW(mm)xH(mm)
	(W)	(V)	
HL-T530	5W	AC165-265	357x23x35
HL-T560	9W	AC165-265	625x23x35
HL-T5120	18W	AC165-265	1232x23x35

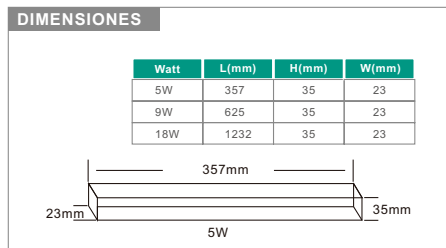



INTEGRATED LED TUBE T8

CHARACTERISTIC DESCRIPTION

- The integrated linear luminescence LED consist of base, LED light source, driver and diffuser.
- Ideal for house, shop,school,office etc.
- Ready for installing and use.
- LED tube with high luminous efficiency.
- Aluminum base with high dispersion ability.
- Diffuser: PC
- Distribution type: direct symmetry
- Installation type:surface mounted



MODEL	POWER	VOLTAGE	LUMEN	L(mm)xW(mm)xH(mm)
	(W)	(V)	(lm)	
HL-T809	18W	AC175-250	7202	615x25x78
HL-T818	36W	AC175-250	1440	1215x25x78

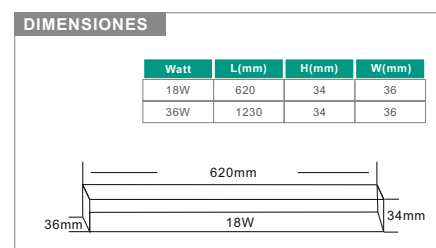





PLAT INTEGRATED LED TUBE

CHARACTERISTIC DESCRIPTION

- The integrated luminescence LED used in a specific environment, like parking, installation industry, food processing and kitchen.
- Durable modern design.
- Long life, with free maintenance.
- Installation type: Transcend or embed in roof
- Distribution type: direct symmetry



MODEL	POWER	VOLTAGE	L(mm)xW(mm)xH(mm)
	(W)	(V)	
HL-PL18	18W	AC175-250	615x78x25
HL-PL36	36W	AC175-250	1215x78x25

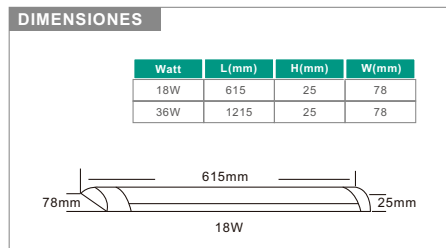



LED FLOODLIGHT

CHARACTERISTIC DESCRIPTION

- Slim design, perfect lighting free zone.
- Integrated cooling design, elegant, efficient.
- LED SMD System, Secondary drive electronics.
- Aluminum body, excellent heat treatment, high intensity tempered glass.
- Professional outdoor painting, stainless steel components, giving excellent performance in anti-corrosion and anti-rusting, widely used in different environment, like exterior walls, gardens.
- Inclined bracket easier installation
- Operating ambient temperature: -20°C - 40°C
- Color: black / grey



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPER ATUER	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
WS-10W	10W	AC220-240	800	>93	80	3000K	80	120°	30000
WS-10W	10W	AC220-240	800	>93	80	6500K	80	120°	30000
WS-20W	20W	AC220-240	1600	>93	80	3000K	80	120°	30000
WS-20W	20W	AC220-240	1600	>93	80	6500K	80	120°	30000
WS-30W	30W	AC220-240	2400	>93	80	3000K	80	120°	30000
WS-30W	30W	AC220-240	2400	>93	80	6500K	80	120°	30000
WS-50W	50W	AC220-240	4000	>93	80	3000K	80	120°	30000
WS-50W	50W	AC220-240	4000	>93	80	6500K	80	120°	30000
WS-100W	100W	AC220-240	8000	>93	80	3000K	80	120°	30000
WS-100W	100W	AC220-240	8000	>93	80	6500K	80	120°	30000
WS-150W	150W	AC220-240	12000	>93	80	3000K	80	120°	30000
WS-150W	150W	AC220-240	12000	>93	80	6500K	80	120°	30000
WS-200W	200W	AC220-240	16000	>93	80	3000K	80	120°	30000
WS-200W	200W	AC220-240	16000	>93	80	6500K	80	120°	30000
WS-300W	300W	AC220-240	24000	>93	80	3000K	80	120°	30000
WS-300W	300W	AC220-240	24000	>93	80	6500K	80	120°	30000

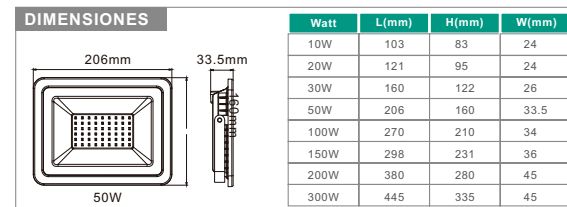



LED FLOODLIGHT WITH PIR SENSOR


CHARACTERISTIC DESCRIPTION

- Slim design, perfect lighting free zone.
- Integrated cooling design, elegant, efficient.
- LED SMD System, Secondary drive electronics.
- Aluminum body, excellent heat treatment, high intensity tempered glass.
- Professional outdoor painting, stainless steel components, giving excellent performance in anti-corrosion and anti-rusting, widely used in different environment, like exterior walls, gardens
- Infrared transmission sensor PIR
- Inclined bracket easier installation
- Operating ambient temperature: -20°C - 40°C
- Color: black / grey




MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPERATURE	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
WS-10PIR	10W	AC220-240	800	>93	80	3000K	80	120°	30000
WS-10PIR	10W	AC220-240	800	>93	80	6500K	80	120°	30000
WS-20PIR	20W	AC220-240	1600	>93	80	3000K	80	120°	30000
WS-20PIR	20W	AC220-240	1600	>93	80	6500K	80	120°	30000
WS-30PIR	30W	AC220-240	2400	>93	80	3000K	80	120°	30000
WS-30PIR	30W	AC220-240	2400	>93	80	6500K	80	120°	30000
WS-50PIR	50W	AC220-240	4000	>93	80	3000K	80	120°	30000
WS-50PIR	50W	AC220-240	4000	>93	80	6500K	80	120°	30000
WS-100PIR	100W	AC220-240	8000	>93	80	3000K	80	120°	30000
WS-100PIR	100W	AC220-240	8000	>93	80	6500K	80	120°	30000

DIMENSIONES



Watt	L(mm)	H(mm)	W(mm)
10W	103	155	50
20W	121	163	52
30W	159	193	52
50W	206	216	54
100W	260	270	56

FOTOMETRIA Angulo 120°



RECHARGEABLE LED FLOODLIGHT

CHARACTERISTIC DESCRIPTION

- LED Floodlight is widely used in car, camping, fishing etc.
- With high luminous efficiency and saving energy.
- Advanced SMD LED system.
- Aluminum alloy cascade, high capacity scattering.
- Operating ambient temperature: -20°C - 40°C,
- Protection : IP65




TECHNIQUE DATA

MODEL	LED	POWER	LUMEN	BEAM ANGLE	INGRESS PROTECTION	LIFE TIME
		(W)	(lm)			(h)
GM-3310	2x16pcs SMD 5730	10W	550	120°	IP65	35000
GM-3320	2x16pcs SMD 5730	20W	1100	120°	IP65	35000
GM-3330	2x16pcs SMD 5730	30W	1650	120°	IP65	35000
GM-3350	2x16pcs SMD 5730	50W	27500	120°	IP65	35000

BATTERY


TYPE	CAPACITY	RATED VOLTAGE	CHARGING TIME	WORKING TIME
		(V)	(h)	(h)
LITIO	2200AH	3.7	4	5
LITIO	2200AH	7.4	4	4
LITIO	4400AH	7.4	4	6
LITIO	4400AH	14.8	4	6


DIMENSIONES



Watt	L(mm)	H(mm)	W(mm)
10W	135	265	127
20W	160	298	184
30W	225	392	244

FOTOMETRIA Angulo 120°



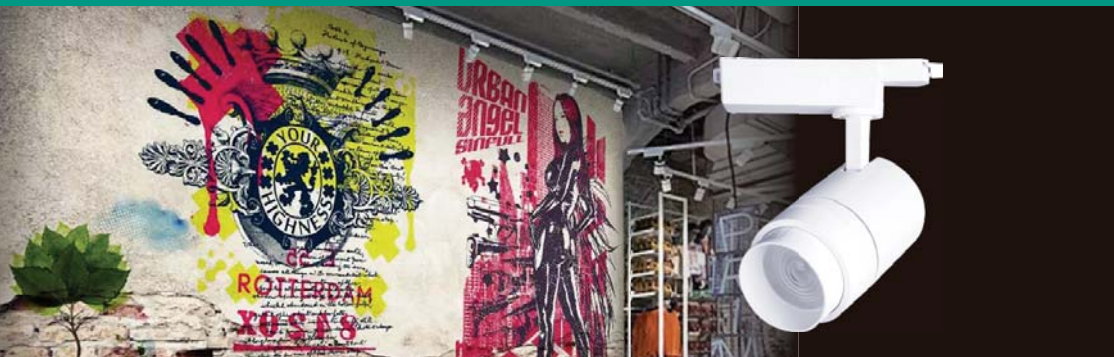

LED TRACK LIGHT

LED TRACK LIGHT

CHARACTERISTIC DESCRIPTION

- Modern design, perfect commercial lighting.
- Aluminum alloy cascade, high capacity scattering.
- High quality LED COB.
- Color: black/white







CHARACTERISTIC DESCRIPTION

- Modern design, perfect commercial lighting.
- Aluminum alloy cascade, high capacity scattering.
- High quality LED COB.
- Color: black/white



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPER ATUER	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
GD181	20W	AC80-265	1600	>50	80	3500K	80	15/18/25/38/60°	30000
GD181	30W	AC80-265	2400	>50	80	3500K	80	15/18/25/38/60°	30000

MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPER ATUER	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
GD182	12W	AC80-265	960	>50	80	3500K	80	24°	30000
GD182	20W	AC80-265	1600	>50	80	3500K	80	24°	30000
GD182	30W	AC80-265	2400	>50	80	3500K	80	24°	30000

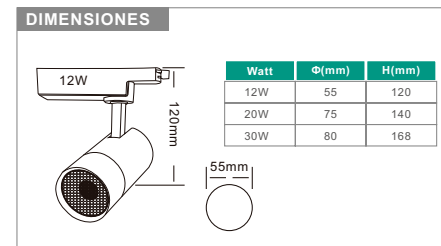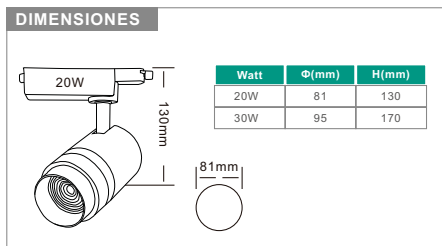





LED TRACK LIGHT

CHARACTERISTIC DESCRIPTION

- Modern design, perfect commercial lighting.
- Aluminum alloy cascade, high capacity scattering.
- High quality LED COB.
- Color: black/white



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPER ATUER	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
GD075	20W	AC80-265	1600	>50	80	3500K	80	24°	30000
GD075	30W	AC80-265	2400	>50	80	3500K	80	24°	30000

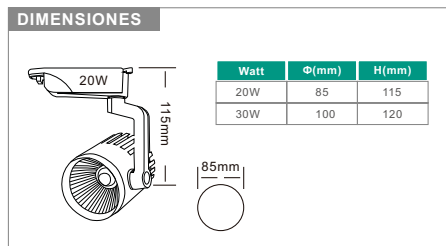



LED TRACK LIGHT

CHARACTERISTIC DESCRIPTION

- Modern design, perfect commercial lighting.
- Aluminum alloy cascade, high capacity scattering.
- High quality LED COB.
- Color: black/white



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	COLOR TEMPER ATUER	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
GD183	10W	AC80-265	800	>50	80	3500K	80	24°	30000
GD183	20W	AC80-265	1600	>50	80	3500K	80	24°	30000
GD183	30W	AC80-265	2400	>50	80	3500K	80	24°	30000

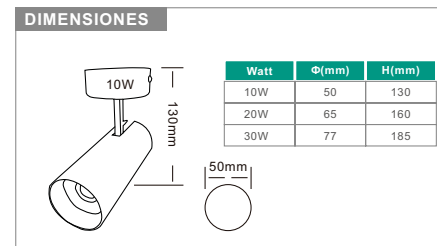



LED Track Rail and Connector

LED CEILING LIGHT

CHARACTERISTIC DESCRIPTION

- Different connectors provide flexible connection between different tracks.
- Material: insulation aluminum alloy.
- Color: black and white





CHARACTERISTIC DESCRIPTION

- Modern design, suitable for indoor light.
- Assembly type: pendant
- Molten aluminum shell.
- High quality LED COB.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
TDM-A028	30W	AC85-265	2400	>50	80	4000K	80	60°	30000

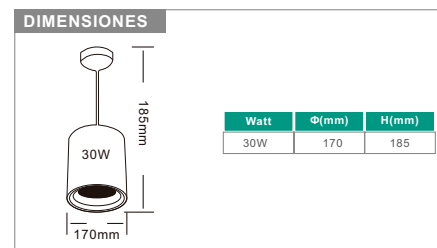





LED BEAN GALLBLADER LIGHT

CHARACTERISTIC DESCRIPTION

- Energy saving and high color reproduction, ideal lighting in commercial facilities, like window, exhibit, lobbying, recycling, decoration or building upgrading facilities.
- Compact, modern and robust design.
- High quality LED COB



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
XL-22-1	30W	AC85-265	2400	>50	80	3500K	80	24°	30000
XL-22-2	30x2W	AC85-265	2400x2	>50	80	3500K	80	24°	30000
XL-22-3	30x3W	AC85-265	2400x3	>50	80	3500K	80	24°	30000

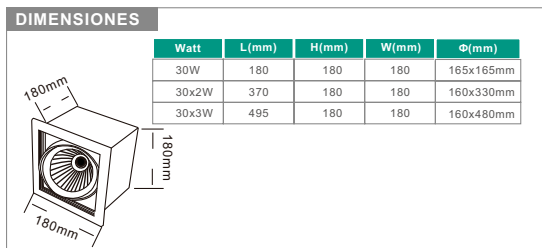



LED DOWNLIGHT LINE COMEX

CHARACTERISTIC DESCRIPTION

- LED Downlight, with high luminous efficiency and low energy consumption.
- High quality LED COB.
- Aluminum alloy cascade, high capacity scattering.
- Back electric driver.
- Ideal for Commercial Use.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
WL-C404	40W	AC85-265	3200	>50	80	4000K	80	60°	30000

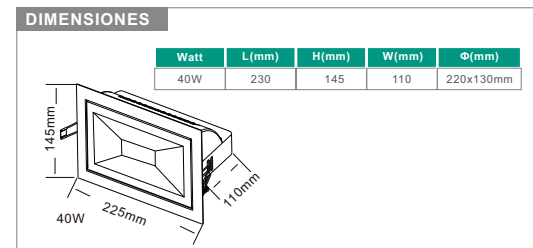



LED DOWNLIGHT LINE FLEX

LED DOWNLIGHT LINE PRO

CHARACTERISTIC DESCRIPTION

- LED Downlight, with high luminous efficiency and low energy consumption.
- High quality LED COB.
- Aluminum alloy cascade, high capacity scattering.
- Back electric driver.
- Installation type: Embed with set zoom







CHARACTERISTIC DESCRIPTION

- LED Downlight, with high luminous efficiency and low energy consumption.
- High quality COB LED.
- Aluminum alloy cascade, high capacity scattering.
- Back electric driver.
- Installation type: Embed with set zoom



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
WL-M074	7W	AC85-265	560	>50	80	3500K	80	24°	30000
WL-M124	12W	AC85-265	960	>50	80	3500K	80	24°	30000
WL-M204	20W	AC85-265	1600	>50	80	3500K	80	24°	30000

MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
WL-I303	30W	AC85-265	2400	>50	80	3000K	80	60°	30000
WL-I503	50W	AC85-265	2400	>50	80	3000K	80	60°	30000

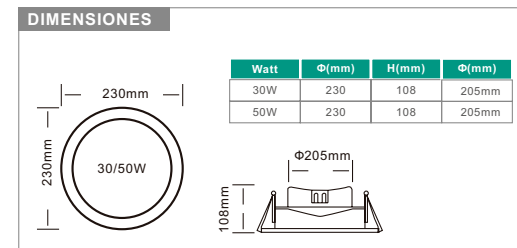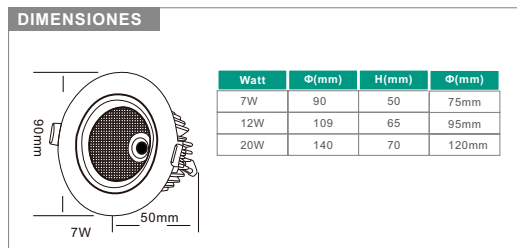



LED DOWNLIGHT LINE OPAC

LED DOWNLIGHT LINE REVIC

CHARACTERISTIC DESCRIPTION

- LED Downlight , with high luminous efficiency and low energy consumption.
- High quality SMD LED.
- Aluminum alloy cascade, high capacity scattering.
- Back electric driver.
- Installation type: Embed with set zoom







CHARACTERISTIC DESCRIPTION

- Downlight LED, with high luminous efficiency and low energy consumption.
- High quality SMD LED.
- Aluminum alloy cascade, high capacity scattering.
- Back electric driver.
- Installation type: Embed with set zoom
- Ashing and vague diffuser .



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
WL-P303	30W	AC85-265	2400	>50	80	3500K	80	60°	30000

MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
WL-R404	40W	AC85-265	3200	>50	80	4000K	80	40°	30000

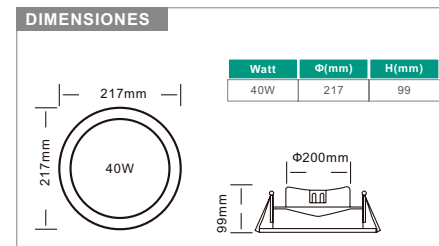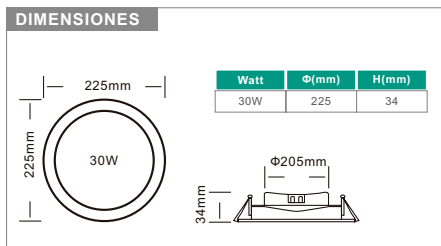





LED DOWNLIGHT LINE SWIN

CHARACTERISTIC DESCRIPTION

- LED Downlight , with high luminous efficiency and low energy consumption.
- High quality COB LED.
- Aluminum alloy cascade, high capacity scattering.
- Back electric driver.
- Installation type: Embed with set zoom
- Heading, ideal for commercial use.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
WL-A404	40W	AC85-265	3200	>50	80	4000K	80	24°	30000

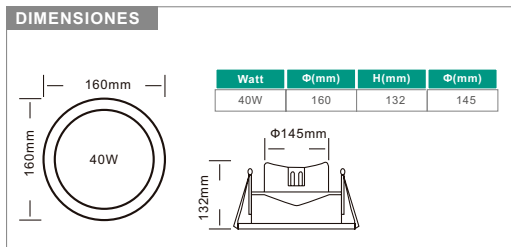



LED DOWNLIGHT LINE EKO

CHARACTERISTIC DESCRIPTION

- LED Downlight, with high luminous efficiency and low energy consumption.
- High quality COB LED.
- Aluminum alloy cascade, high capacity scattering.
- Back electric driver.
- Installation type: Embed with set zoom



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
WL-E203	20W	AC85-265	1600	>50	80	3000K	80	60°	30000
WL-E206	20W	AC85-265	1600	>50	80	6500K	80	60°	30000
WL-E303	30W	AC85-265	2400	>50	80	3000K	80	60°	30000
WL-E306	30W	AC85-265	2400	>50	80	6500K	80	60°	30000
WL-E506	50W	AC85-265	4000	>50	80	6500K	80	60°	30000

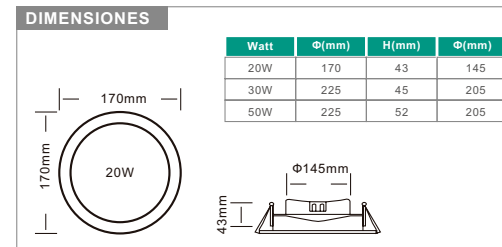





LED DOWNLIGHT LINE HOMMY

CHARACTERISTIC DESCRIPTION

- LED Downlight, with high luminous efficiency and low energy consumption.
- High quality SMD LED.
- Aluminum alloy cascade, high capacity scattering.
- Back electric driver.
- Installation type: Embed with set zoom
- Heading and 45° inclination.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
WL-H073	7W	AC85-265	560	>80	80	3500K	80	36°	30000
WL-H076	7W	AC85-265	560	>90	80	6500K	80	36°	30000

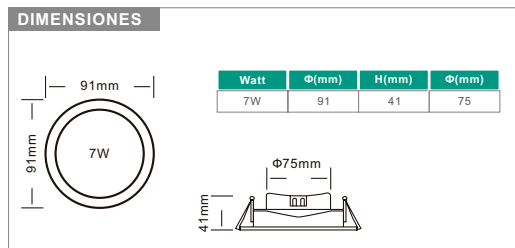



LED UFO LIGHT

CHARACTERISTIC DESCRIPTION

- Design to improve the lighting quality of the warehouse, large area, high cellars, production plants and commercial facilities, by reducing energy and maintenance cost.
- Compact structure, solid, aluminum chassis injection, high scattering ability.
- Security classification: Class I
- Good luminous effect, up to 100lm / W.
- Operating ambient temperature: -25°C - 45°C
- Chain hooks are installed at high places.



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	CRI	BEAM ANGLE	LIFE TIME
	(W)	(V)	(lm)		(lm/W)	(K)			(h)
HCLF03-100W	100W	AC80-265	9000	>50	100	6000K	80	60°	30000
HCLF03-150W	150W	AC80-265	13500	>50	100	6000K	80	60°	30000
HCLF03-200W	200W	AC80-265	18000	>50	100	6000K	80	60°	30000

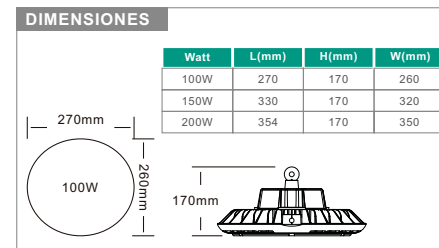



OUTDOOR LIGHT

CHARACTERISTIC DESCRIPTION

- Outdoor light ideal for balcony, corridor, entrance, garden, park etc.
- Aluminum alloy body and glass diffuser
- Include locking system.
- Installation type: Over the walls
- Color: white/black
- Bulb Excluded.



MODEL	POWER	BASE	VOLTAGE
	(W)		(V)
ZY-4006BK	60W	E27	110-220
ZY-4006WH	60W	E27	110-220

DIMENSIONES

Watt	L(mm)	H(mm)	W(mm)
60W	170	330	202

OUTDOOR LIGHT

CHARACTERISTIC DESCRIPTION

- Outdoor light ideal for balcony, corridor, entrance, garden, park etc.
- Aluminum alloy body and glass diffuser
- Include locking system.
- Installation type: Over the walls
- Color: white/black
- Bulb Excluded.



MODEL	POWER	BASE	VOLTAGE
	(W)		(V)
ZY-4004BK	60W	E27	110-220
ZY-4004WH	60W	E27	110-220

DIMENSIONES

Watt	L(mm)	H(mm)	W(mm)
60W	155	360	195



OUTDOOR LIGHT

CHARACTERISTIC DESCRIPTION

- Outdoor light ideal for balcony, corridor, entrance, garden, park etc.
- Aluminum alloy body and glass diffuser
- Include locking system.
- Installation type: Over the walls
- Color: white/black
- Bulb Excluded.



MODEL	POWER	BASE	VOLTAGE
	(W)		(V)
ZY-4007BK	60W	E27	110-220
ZY-4007WH	60W	E27	110-220

DIMENSIONES

Watt	L(mm)	H(mm)	W(mm)
60W	165	400	200



TURTLES OUTDOOR LIGHT

CHARACTERISTIC DESCRIPTION

- Turtles outdoor light, ideal for balcony, corridor, entrance, garden, park etc.
- Modern design for the decoration areas.
- Aluminum alloy body and glass diffuser.
- Include locking system.
- Installation type: Over the walls
- Color: white/black
- Bulb not included.



MODEL	POWER	BASE	VOLTAGE
	(W)		(V)
ZY-5001BK	60W	E27	220
ZY-5001WH	60W	E27	220

DIMENSIONES

Watt	L(mm)	H(mm)
60W	210	110




TURTLES OUTDOOR LIGHT

CHARACTERISTIC DESCRIPTION

- Turtles out door light, ideal decorative lighting for balcony, corridor, entrance, garden, park etc.
- Modern design for the decoration areas.
- Aluminum alloy body and glass diffuser.
- Include locking system.
- Installation type: Over the walls
- Color: white/black
- Bulb not included.



MODEL	POWER	BASE	VOLTAGE
	(W)		(V)
ZY-5002BK	60W	E27	220
ZY-5002WH	60W	E27	220

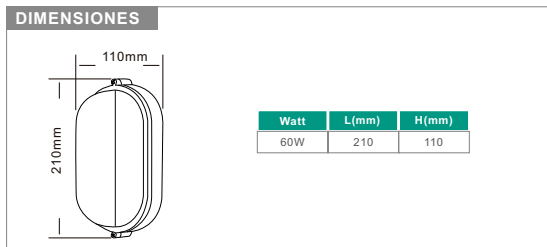


TURTLES OUTDOOR LIGHT

CHARACTERISTIC DESCRIPTION

- Turtles out door light, ideal decorative lighting for balcony, corridor, entrance, garden, park etc.
- Modern design for the decoration areas.
- Aluminum alloy body and glass diffuser.
- Include locking system.
- Installation type: Over the walls
- Color: white/black
- Bulb not included.



MODEL	POWER	BASE	VOLTAGE
	(W)		(V)
ZY-5004BK	60W	E27	220
ZY-5004WH	60W	E27	220

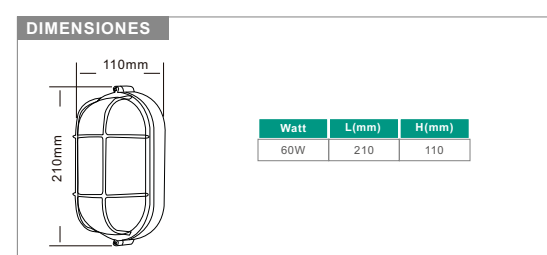



TURTLES OUTDOOR LIGHT

CHARACTERISTIC DESCRIPTION

- Turtles out door light, ideal decorative lighting for balcony, corridor, entrance, garden, park etc.
- Modern design for the decoration areas.
- Aluminum alloy body and glass diffuser.
- Include locking system.
- Installation type: Over the walls
- Color: white/black
- Bulb not included.



MODEL	POWER	BASE	VOLTAGE
	(W)		(V)
ZY-5003BK	60W	E27	220
ZY-5003WH	60W	E27	220

DIMENSIONES


Watt	L(mm)	H(mm)
60W	180	95



EMERGENCY LED

CHARACTERISTIC DESCRIPTION

- Emergency chargeable LED, ideal for public places, such as factories, hotels, schools, shops, etc.
- Emergency light with two focus bulb.
- ABS body, transparent polycarbonate diffuser.
- Up to 50000 hours.
- Test button
- High brightness mode.
- Protection: IP20



TECHNIQUE DATA

MODEL	LED	POWER	LUMEN	BEAM ANGLE	CCT
		(W)	(lm)	(K)	(K)
2923	2x16pcs SMD 5730	2.4W	1200	120°	6500K

BATTERY

SERVICE LIFE	TYPE	CAPACITY RATED	RATED VOLTAGE	LOADING TIME	AUTONOMY
(H)			(V)	(H)	(H)
35000	LITIO	6V4AH	4	24	8/12

DIMENSIONES


Watt	L(mm)	H(mm)	W(mm)
2W	296	280	123



EMERGENCY EQUIPMENT 30 LED

CHARACTERISTIC DESCRIPTION

- Emergency chargeable LED, ideal for public places, such as factories, hotels, schools, shops, etc.
- Automatic ignition and shutdown.
- Rechargeable battery.
- Test button.
- Battery status indicators.




TECHNIQUE DATA

MODEL	POWER	LUMEN	ANGLE	CCT	SERVICE LIFE	LED
	(W)	(lm)		(K)	(h)	
SWT-2128	2W	180	120°	6500K	35000	30LED

BATTERY

TYPE	CAPACITY	RATED VOLTAGE	DURATION
		(V)	
LITIO	600AH	3.7	2 years

DIMENSIONES

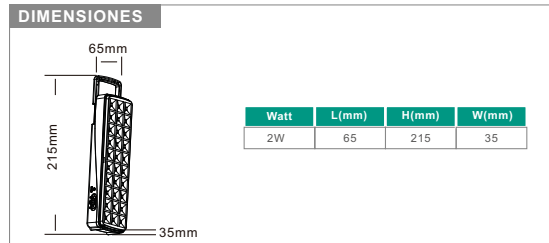

EMERGENCY EQUIPMENT 60 LED

CHARACTERISTIC DESCRIPTION

- Emergency chargeable LED, ideal for public places, such as factories, hotels, schools, shops, etc.
- Automatic ignition and shutdown.
- Rechargeable battery.
- Test button.
- Battery status indicators.




TECHNIQUE DATA

MODEL	POWER	LUMEN	ANGLE	CCT	SERVICE LIFE	CANTIDAD DE LEDS
	(W)	(lm)		(K)	(h)	
SWT-918S	4W	140	120°	6500K	35000	60LED

BATTERY

TYPE	CAPACITY	RATED VOLTAGE	DURATION
		(V)	
LITIO	3000AH	3.7	2 years

DIMENSIONES

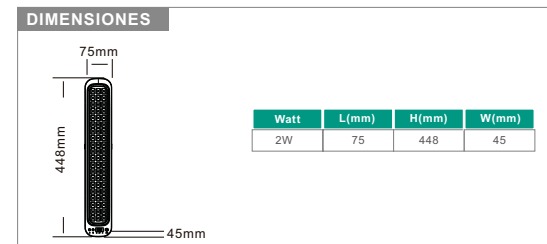




EMERGENCY EQUIPMENT 100 LED

EXIT EMERGENCY LED


CHARACTERISTIC DESCRIPTION

- Emergency chargeable LED, ideal for public places, such as factories, hotels, schools, shops, etc.
- Automatic ignition and shutdown.
- Rechargeable battery.
- Test button.
- Battery status indicators.



CHARACTERISTIC DESCRIPTION

- Exit emergency LED, ideal for public places, such as factories, hotels, schools, shops, etc.
- ABS body, PMMA panel.
- Load indicator.
- Test button.
- Battery: Nickel-Cadmium.
- Protection: IP20.



TECHNIQUE DATA

MODEL	POWER	LUMEN	ANGLE	CCT	SERVICE LIFE	LED
	(W)	(lm)		(K)	(h)	
SWT-918L	6.7W	160	120°	6000K	35000	100LED

TECHNIQUE DATA

MODEL	POWER	LUMEN	CCT	SERVICE LIFE	LED
	(W)	(lm)	(K)	(h)	
SWT-298	2.5W	8.3	6500K	35000	5LED


BATTERY

TYPE	CAPACITY	RATED VOLTAGE	DURATION
		(V)	
LITIO	3000AH	3.7	2 years


BATTERY

TYPE	CAPACITY	RATED VOLTAGE	CHARGING TIME	AUTONOMY
		(V)	(H)	(H)
Nickel Cadmium	3.6V500mAH	3.6	24	6

DIMENSIONES

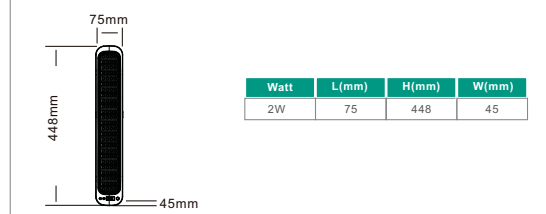

DIMENSIONES

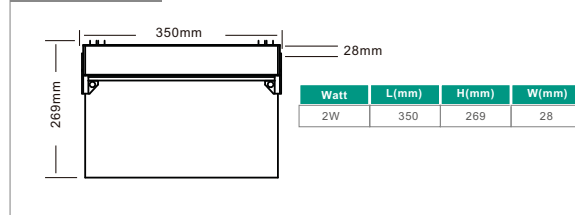



EXIT EMERGENCY LED

CHARACTERISTIC DESCRIPTION

- Exit emergency LED, ideal for public places, such as factories, hotels, schools, shops, etc.
- ABS body, PMMA panel.
- Load indicator.
- Test button.
- Battery: Nickle-Cadmium
- Protection: IP20


TECHNIQUE DATA

MODEL	POWER	LUMEN	CCT	SERVICE LIFE	LED
	(W)	(lm)	(K)	(h)	
SWT-298	2.5W	8.3	6500K	35000	5LED

BATTERY

TYPE	CAPACITY	RATED VOLTAGE	CHARGING TIME	AUTONOMY
		(V)	(H)	(H)
Nickel Cadmium	3.6V500mAH	3.6	24	6

DIMENSIONES

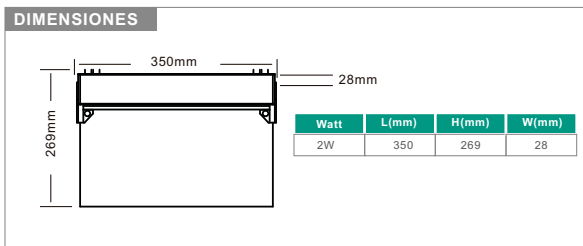

APPLICATION SOLAR LED

CHARACTERISTIC DESCRIPTION

- Application solar LED, ideal for garden, courtyard, road, balcony, entrance etc.
- Save 100% electric consumption.
- Automatic ignition and shutdown.
- No required maintenance.
- No wires required.

TECHNIQUE DATA

MODEL	POWER	LUMEN	ANGLE	CCT	SERVICE LIFE	MODE
	(W)	(lm)		(K)	(h)	
SWT-36	2.5W	200	120°	6500K	30000	full/ half / sensors




PANELSOLAR


PANEL	CHARGING TIME	LIGHTING TIME	SERVICE LIFE
		(h)	
Monocrystalline silicon	2.5W	8	20-25 years

BATTERY

TYPE	CAPACITY	RATED VOLTAGE	DURATION
		(V)	
LITIO	1500AH	3.7	2 years

DIMENSIONES

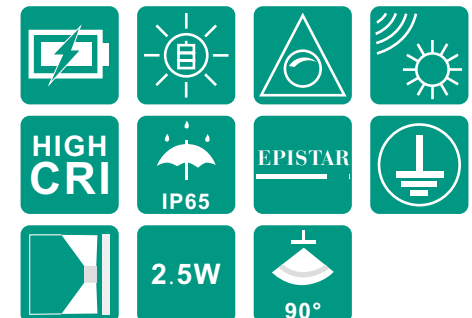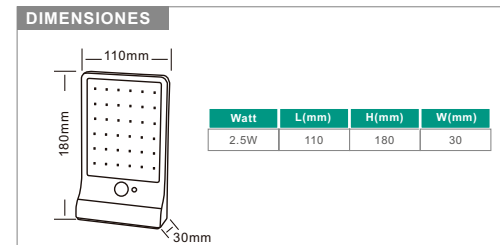

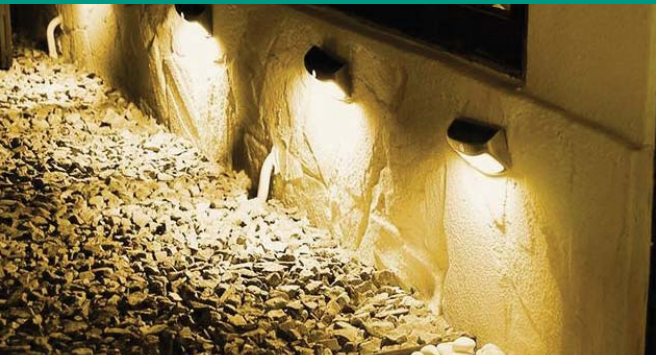

APPLICATION SOLAR LED

CHARACTERISTIC DESCRIPTION

- Application solar LED, ideal for garden, courtyard, road, balcony, entrance etc.
- Save 100% electric consumption.
- Automatic ignition and shutdown.
- No required maintenance.
- No wires required.

1.5Ah IP65 2835 SMD 20 SMD AUTONOMIA 12-16hrs

TECHNIQUE DATA

MODEL	POWER	LUMEN	ANGLE	CCT	SERVICE LIFE	MODE
	(W)	(lm)		(K)	(h)	
SWT-20	0.5W	180	120°	6500K	30000	full / half / sensors

PANELSOLAR

PANEL	CHARGING TIME	LIGHTING TIME	SERVICE LIFE
		(h)	
Monocrystalline silicon	0.5W	10	20-25 years

BATTERY

TYPE	CAPACITY	RATED VOLTAGE	DURATION
		(V)	
LITIO	1200AH	3.7	2 years

DIMENSIONES

Watt	L(mm)	H(mm)	W(mm)
0.5W	95	125	48

WALL LIGHT SOLAR LED

CHARACTERISTIC DESCRIPTION

- Application solar LED, ideal for garden, courtyard, road, balcony, entrance etc.
- Save 100% electric consumption.
- Automatic ignition and shutdown.
- No required maintenance.
- No wires required.

1.5Ah IP65 2835 SMD 24 SMD AUTONOMIA 12-16hrs

TECHNIQUE DATA

MODEL	POWER	LUMEN	ANGLE	CCT	SERVICE LIFE	MODE
	(W)	(lm)		(K)	(h)	
SWT-24	1W	300	120°	6500K	30000	full / half / sensors

PANELSOLAR

PANEL	CHARGING TIME	LIGHTING TIME	SERVICE LIFE
		(h)	
Monocrystalline silicon	1W	8	20-25 years

BATTERY

TYPE	CAPACITY	RATED VOLTAGE	DURATION
		(V)	
LITIO	1500AH	3.7	2 years

DIMENSIONES

Watt	L(mm)	H(mm)	W(mm)
1W	165	114	55



WALL LIGHT SOLAR LED

CHARACTERISTIC DESCRIPTION

- Application solar LED, ideal for garden, courtyard, road, balcony, entrance etc.
- Save 100% electric consumption.
- Automatic ignition and shutdown.
- No required maintenance .
- No wires required.

TECHNIQUE DATA

MODEL	POWER	LUMEN	ANGLE	CCT	SERVICE LIFE	MODE
	(W)	(lm)		(K)	(h)	
SWT-40	1.2W	180	120°	6500K	30000	

PANELSOLAR

PANEL	CHARGING TIME	LIGHTING TIME	SERVICE LIFE
		(h)	
Monocrystalline silicon	1.2W	8	20-25 years

BATTERY

TYPE	CAPACITY	RATED VOLTAGE	DURATION
		(V)	
LITIO	1200AH	3.7	12-16 hours

DIMENSIONES

Watt	L(mm)	H(mm)	W(mm)
1.2W	175	124	50



WALL SOLAR LED

CHARACTERISTIC DESCRIPTION

- WALL solar LED, ideal for garden, courtyard, road, balcony, entrance etc.
- Classical colonial design.
- Save 100% electric consumption.
- Automatic ignition and shutdown.
- Up to 50000 hours.
- No required maintenance.
- Easy to install, no wires required.

TECHNIQUE DATA

MODEL	POWER	LUMEN	ANGLE	CCT	SERVICE LIFE	MODE
	(W)	(lm)		(K)	(h)	
RT-25	0.3W	24	90°	6500K	30000	full / half / sensors

PANELSOLAR


PANEL	CHARGING TIME	LIGHTING TIME	SERVICE LIFE
		(h)	
Monocrystalline silicon	0.3W	12	20-25 years

BATTERY

TYPE	CAPACITY	RATED VOLTAGE	DURATION
		(V)	
LITIO	900AH	1.2	2 years

DIMENSIONES

Watt	L(mm)	H(mm)	W(mm)
0.3W	180	280	160

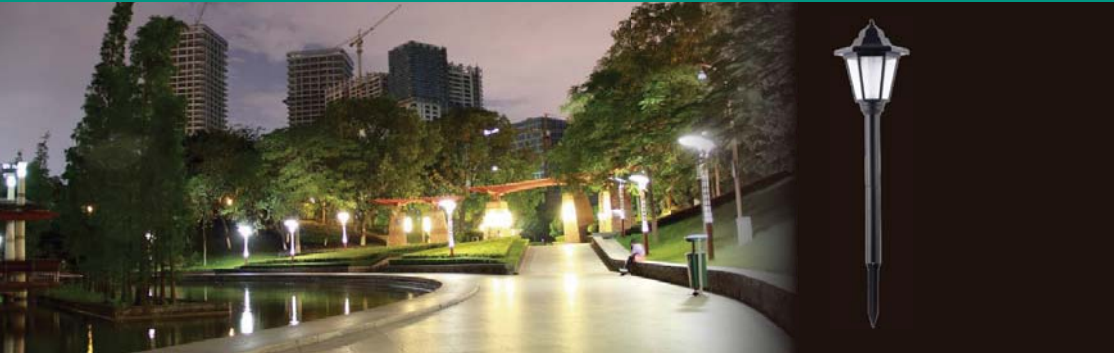

TIMBER PILE SOLAR LED

CHARACTERISTIC DESCRIPTION

- Timber pile solar LED, ideal for garden, courtyard, road, balcony, entrance etc.
- Classical colonial design.
- Save 100% electric consumption.
- Automatic ignition and shutdown.
- Up to 50000 hours.
- No required maintenance.
- Easy to install, no wires required.



TECHNIQUE DATA

MODEL	POWER	LUMEN	ANGLE	CCT	SERVICE LIFE	MODE
	(W)	(lm)		(K)	(h)	
RT-26	0.3W	24	90°	6500K	30000	full / half / sensors


PANELSOLAR

PANEL	CHARGING TIME	LIGHTING TIME	SERVICE LIFE
		(h)	
Monocrystalline silicon	0.3W	12	20-25 years


BATTERY

TYPE	CAPACITY	RATED VOLTAGE	DURATION
		(V)	
LITIO	900AH	1.2	2 years

DIMENSIONES



Watt	L(mm)	Φ(mm)
0.3W	650	160



Rechargeable battery

Raincoat

SOLAR LED FOODLIGHT



TECHNIQUE DATA

MODEL	POWER	LUMEN	CCT	PROTECTION	SERVICE LIFE
	(W)	(lm)	(K)		(h)
TK-30W	30W	660	6500K	IP65	3 years aproximados
TK-60W	60W	1100	6500K	IP65	3 years aproximados
TK-100W	100W	1700	6500K	IP65	3 years aproximados



PANELSOLAR

SOLAR PANEL	POWER	DIMENSION	SERVICE LIFE TIME
	(W)	(mm)	(h)
Polysilicon	8W 6V	350x210x17	15-20 years
	15W 6V	350x350x17	
	18W 6V	350x400x17	


BATTERY

TYPE	CAPACITY	RATED VOLTAGE	CHARGING TIME	LIGHTING TIME	DURATION
		(V)	(h)	(h)	(h)
LITIO	5000mA	3.2	6	12	30000
LITIO	10000mA	3.2	6	12	30000
LITIO	20000mA	3.2	6	12	30000


CARACTERISTICAS

- SOLAR LED FOODLIGHT, ideal for garden, courtyard, road, balcony, entrance etc.
- Save 100% electric consumption.
- Automatic ignition and shutdown.
- Up to 20000 hours.
- Minimal maintenance.
- Easy to install, no wires required.
- Battery replacement cabin.

DIMENSIONES




Watt	L(mm)	H(mm)	W(mm)
30W	195	167	35
60W	219	190	45
100W	260	228	46



Rechargeable battery

Solar

Raincoat

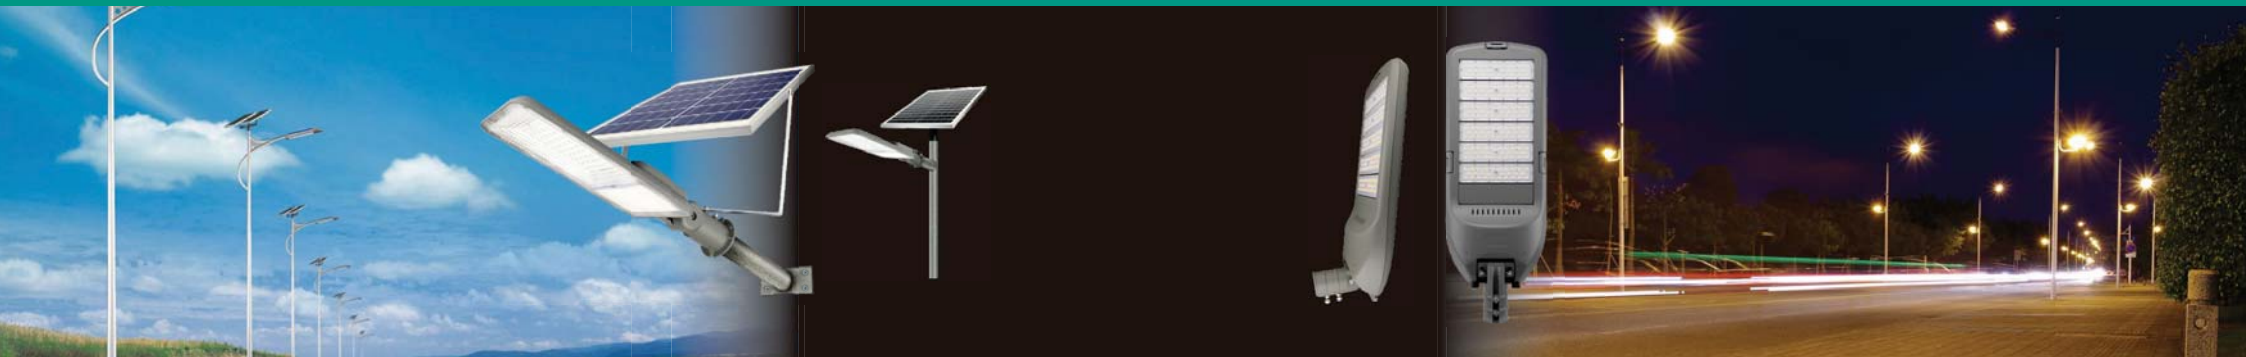

LUMINESCENCE SOLAR LED

PUBLIC LED LIGHT

TECHNIQUE DATA

MODEL	POWER	LUMEN	CCT	PROTECTION	SERVICE LIFE
	(W)	(lm)	(K)		(h)
TR01-60W	60W	9000	6500K	IP65	3 years
TR01-100W	100W	15000	6500K	IP65	3 years
TR01-150W	150W	22500	6500K	IP65	3 years



CARACTERÍSTICAS

- Luminescence solar LED, widely used in highways, apartments, campuses, squares and football fields.
- Save 100% electric consumption.
- Automatic ignition and shutdown.
- Up to 30000 hours.
- Minimal maintenance.
- Easy to install, no wires required.
- Battery replacement cabin.

PANELSOLAR

SOLAR PANEL	POWER	DIMENSION SERVICE	LIFE TIME
	(W)	(mm)	(h)
Polysilicon	20/30/40W	350x400x17 350x620x25 510x580x25	15 -20 years

BATTERY


TYPE	CAPACITY	RATED VOLTAGE	CHARGING TIME	LIGHT TIME	DURATION
		(V)	(h)	(h)	
LITIO	20000mA	3.2	8-10	12 years	3 years
LITIO	30000mA	3.2	8-10	12 years	3 years
LITIO	40000mA	3.2	8-10	12 years	3 years

DIMENSIONES

Watt	L(mm)	H(mm)	W(mm)
60W	175	452	76
100W	200	472	76

GARANTIAS:

- Garantía LED 3años
- Garantía Driver 3años
- Garantíapanel solar5años



CARACTERÍSTICAS

- Street light LED is designed for lighting roads, streets, bridges, parking, etc.
- Air explosive design, modern and elegant.
- High quality driver, anti heating and anti tension
- Operating ambient temperature: -40°C - 60°C.
- Protection: IP65
- Maximum working load: 100W-8-10M,150W/200W/240W-10-12M,300W/400W-12Mmore.




MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	LED CHIP	DRIVER	LIFE TIME
	(W)		(lm)		(lm/W)	(K)		(V)	(h)
ZY-6028	100W	AC220-240	13500	>90	135	3000/4000/5700K	3030	Meanwell	50000
ZY-6028	150W	AC220-240	20250	>90	135	3000/4000/5700K	3030	Meanwell	50000
ZY-6028	200W	AC220-240	27000	>90	135	3000/4000/5700K	3030	Meanwell	50000
ZY-6028	240W	AC220-240	32400	>90	135	3000/4000/5700K	3030	Meanwell	50000
ZY-6028	300W	AC220-240	40500	>90	135	3000/4000/5700K	3030	Meanwell	50000
ZY-6028	400W	AC220-240	54000	>90	135	3000/4000/5700K	3030	Meanwell	50000

DIMENSIONES

Watt	L(mm)	H(mm)	W(mm)
100W	340	720	137
150W	340	720	137
200W	350	860	138
240W	350	860	138
300W	360	990	164
400W	360	990	164

FOTOMETRIA Angulo 150°





PUBLIC LED LIGHT

CARACTERISTICAS

- Street light LED is designed for lighting roads, streets, bridges, parking, etc.
- Air explosive design, modern and elegant.
- High luminous efficiency, 135lm/W.
- Operating temperature: -40°C - 60°C
- Protection: IP65
- Movable arm



MODEL	POWER	VOLTAGE	LUMEN	POWER FACTOR	EFFICIENCY	CCT	MOUNTING HEIGHT	LIFE TIME
	(W)		(lm)		(lm/W)	(K)	(m)	(h)
RX-50W	50W	AC220-240	4750	>90	135	2700/4500/6000K	5	30000
RX-100W	100W	AC185-260	9500	>90	135	2700/4500/6000K	6	30000
RX-150W	150W	AC180-260	14250	>90	135	2700/4500/6000K	8	30000
RX-200W	200W	AC180-260	19000	>90	135	2700/4500/6000K	10	30000

